

Z.A.R. 15





ZAR 15 - For those who are not afraid to get dirty

The rim profile is optimized for the use of bigger brakes and the installation of specialized tires for competition use.

The **solid spoke design increases the strength** of the wheel while the valve is protected to prevent damage caused by stones.

The **3-coat powder coating** protects from impact and abrasion damages, as well as giving a clean and professional appearance.

MATERIAL

- Aluminum alloy A356-T6

AVAILABLE SIZES

Size	Min ET	Max ET	Min PCD	Max PCD	Weight (kg)
6,5 x 15"	16	50	98 x 4	130 x 5	From 8.3 to 9
7 x 15"	16	56	98 x 4	130 x 5	From 8.5 to 9.3


INSERTS

- Taper 60°
- Taper 90°
- Flat

USE

- Tarmac rally
- Gravel rally

AVAILABLE COLORS

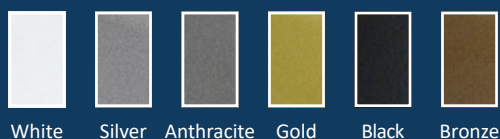

Arcasting

EVOCORSE



Via Staizza, 56 - 31033
Castelfranco Veneto (TV) - Italy

+ 39 049 936 50 50

+ 39 049 936 88 96

evocorse.com

evo@evocorse.com

